LeMatic Single Lane Slicer

FEATURING THE LATEST SLICING TECHNOLOGY




- Designed to Fit with the LeMatic LX3 Variety Bagger or Stand Alone Operation
- Available with Hinge, Web (Butterfly) and Through (Band) Slicing
- Fully Adjustable for Slicing Height and a Variety of Products
- Capable of Slicing Single or Dual Lanes
- Stainless Steel Construction
- Variable Speed Conveyors
- Operator Friendly
- Includes HMI

The SLS can be supplied with the B1 Band Slicer or the G3 Hinge/Web Slicing Head or with both options

2410 W. Main Street, Jackson, MI USA 49203 • Phone: 517.787.3301 • www.lematic.com

Single Lane Slicer

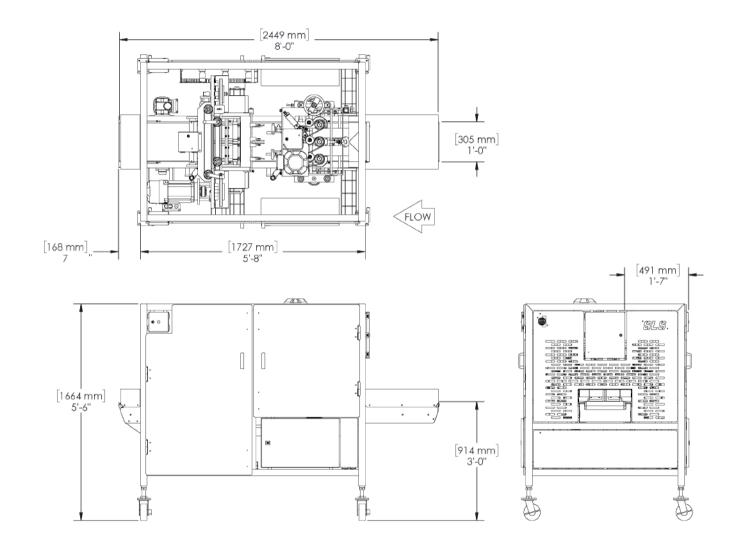

General Specifications:

- •125 pieces per lane/per minute (*based on 4" product)
- Product Width: 6" Max
- Product Height: 4" Max
- •Air Requirements: 0.05 CFM [1.4L/M] @90 PSI [6.2bar]
- •Air Connection: 1/4" NPT

• Electrics: All 3-Phase Electrics Available

Options:

- •Available with Optional Locking Castors
- Single or Dual Lanes
- •Extended Conveyor Lengths Available
- •UL, CUL/CSA, CE Compliance

2410 W. Main Street, Jackson, MI USA 49203 • Phone: 517.787.3301 • www.lematic.com