
FEATURING THE LATEST SLICING TECHNOLOGY



- Includes HMI
- •Available with Hinge, Web, and Through Slicing
- Variable Speed
- •Fully Adjustable for Slicing Height and a Variety of Products
- Capable of Slicing Single or Dual Lanes
- Stainless Steel Construction
- Operator Friendly
- •Works well with the LeMatic LX3 Variety Bagger or Stand Alone Operation

The SLS can be supplied with the Band Slicer and/or the Hinge/Web Slicing Head

Single Lane Slicer

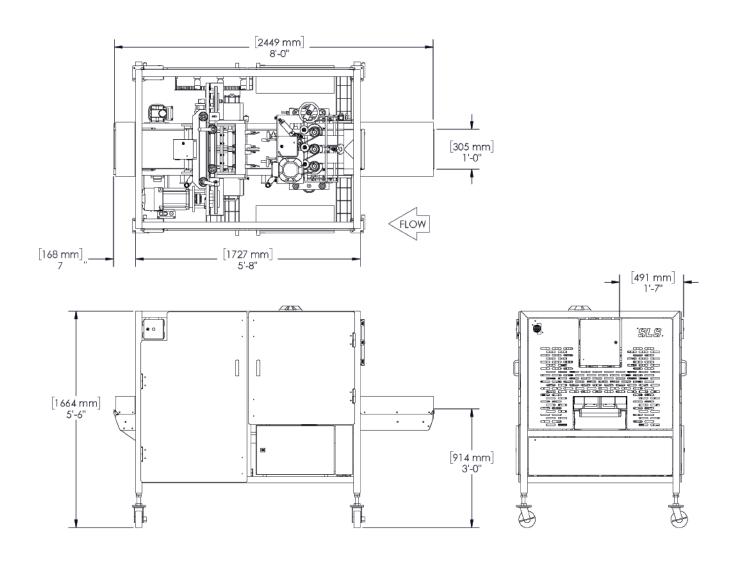

General Specifications:

- •125 Pieces Per Lane/Per Minute (*Based on 4" Product)
- Product Width: 6" Max
- •Product Height: 4" Max
- •Air Requirements: 0.05 CFM [1.4L/M] @90 PSI [6.2bar]
- •Air Connection: 1/4" NPT
- Electrics: All 3-Phase Electrics Available

Options:

- •Available with Optional Locking Castors
- •Single or Dual Lanes
- •Extended Conveyor Lengths Available
- •UL, CUL/CSA, CE Compliance